


COMPRESSORS, VACUUM & LIQUID PUMPS

Global Solutions



Pump and Compressor Solutions for OEMs Worldwide

As the leader in providing fluidic solutions to Original Equipment Manufacturers, Thomas continues to develop new products to meet the requirements of evolving markets and applications. Breadth of product, proprietary technologies and global manufacturing benefit our customers.

These distinctions coupled with innovative research and development programs, qualify Thomas as the premier resource utilized by OEMs throughout the world.

Performance Range

The extensive product line presented in this catalog offers custom solutions configured to meet specific requirements.

- Flow** - The flow range extends to 22.1 cfm (625 l/min).
- Pressure** - The pressure range extends to 175 psi (12 bar).
- Vacuum** - The vacuum range extends to 99% of local barometer (10 mbar abs).
- Liquid** - Thomas pumps cover a flow range to 1800 ml/min and pressures to 60 m H₂O. These pumps are self-priming and can also be used for dosing applications.



Technology
Selection

Page 4

Series
Selection

Page 5-9

Model
Selection

Page 10-30

WOB-L® Piston	10
Articulated Piston	16
Diaphragm	18
Rotary Vane	22
Linear Diaphragm	26
Liquid Diaphragm	30
Liquid Linear	30
Liquid Peristaltic	30

Technology Selection

Operating Principles for Compressors & Vacuum Pumps



WOB-L* PISTON

Oil-less WOB-L* piston pumps and compressors. Best choice for pressure and/or vacuum applications that require compact, lightweight designs and high performance piston seals.

Free flow: to 7.5 cfm (212 l/min)

Pressure: to 175 psi (12.1 bar)

Vacuum: to 99% local barometer



ROTARY VANE

Oil-less and self-lubricating rotary vane pumps and compressors. Low vibration, nearly pulsation free, compact and in some cases reversible flow operation.

Free flow: to 7 cfm (200 lpm)

Pressure: to 14.5 psi (1 bar)

Vacuum: to 85% local barometer



ARTICULATED PISTON

Oil-less articulating piston pumps and compressors. Well suited for applications that require high pressures with proportionately higher flow capability.

Free flow: to 5.4 cfm (153 l/min)

Pressure: to 175 psi (12.1 bar)



LINEAR

Oil-less linear diaphragm pumps and compressors. Quiet operation, lower pulsation, higher efficiency and fewer wearing parts.

Free flow: to 22.1 cfm (625 l/min)

Pressure: to 10.2 psi (700 mbar)

Vacuum: to 55% local barometer



DIAPHRAGM

Oil-less diaphragm pumps and compressors. Durable diaphragm design provides high efficiency, low sound level and good air tightness. Adapts well to different gases.

Free flow: to 3.2 cfm (91 l/min)

Pressure: to 44 psi (3 bar)

Vacuum: to 99% local barometer

Operating Principles for Liquid Pumps



DIAPHRAGM

Liquid diaphragm pumps. Self priming, dry running and suitable for continuous operation. Drive available for all required AC and DC voltages.

Free flow max: 1800 ml/min

Suction height: 6 m H₂O

Pressure height: 60 m H₂O



PERISTALTIC

Liquid peristaltic pumps. Low vibration, nearly pulsation free and of compact design. Reversible operation. Adjustable through supply voltage.

Free flow max: 746 ml/min

Suction height: 8.0 m H₂O

Pressure height: 10 m H₂O



LINEAR

Liquid linear diaphragm pumps. Very long life and low sound level. For applications with low pressure requirements.

Free flow max: 300 ml/min

Suction height: 3.0 m H₂O

Pressure height: 9.0 m H₂O

Series Selection





WOB-L® Piston

Page 10


FREEFLOW		VOLTAGE	MODEL SERIES	MAXIMUM VACUUM		MAXIMUM PRESSURE	
cfm	l/min			= mbar	= in. Hg	= bar	= psi
0.19	5.4	DC or BLDC	8003	-800	23.6		2.0 29.0
0.25	7.2	AC or DC	8005	-780	23.0		2.5 36.0
0.476	13.5	BLDC	2110Z	0	0		2.1 30.0
0.48	13.6	DC	115	0	0		8.3 120.0
0.49	14.0	AC or DC	8009	0	0		7.0 102.0
0.50	14.2	BLDC	230Z	0	0		2.1 30.0
0.54	15.3	DC	135	0	0		6.0 87.0
0.56	15.8	AC or DC	8006	-800	23.6		3.0 44.0
0.85	24.0	DC	309	-900	26.6		11.0 160.0
0.86	24.5	DC	8009Z	0	0		6.9 100.0
0.92	26.1	AC DC or BLDC	405/415	-910	27.0		6.9 100.0
0.97	27.5	DC	215	0	0		8.3 120.0
1.0	28.3	BLDC	250Z	-820	24.2		2.1 30.0
1.1	31.0	AC or DC	8006Z	-950	28.0		3.0 44.0
1.1	32.3	BLDC	2220Z	0	0		2.1 30.0
1.2	34.0	BLDC	2250Z	-870	25.9		2.1 30.0
1.2	34.0	AC	380	-890	26.2		6.9 100.0
1.2	34.5	AC	617	-910	26.8		6.9 100.0
1.3	36.0	DC	319	-940	27.8		8.3 120.0
1.55	43.9	BLDC	380Z	-874	25.8		6.9 100.0
1.6	45.3	AC	668	-920	27.2		6.9 100.0
1.8	50.1	BLDC	260Z	-860	25.5		2.1 30.0
2.4	68.0	AC	660	-910	27.0		3.4 50.0
2.9	82.1	AC or BLDC	2450	0	0		2.1 30.0
3.0	85.0	AC	2380B	-910	26.9		0.0 0.0
3.1	89.2	AC	2668/2688	-980	29.0		12.1 175.0
3.14	88.9	BLDC	2380Z	-895	26.4		6.9 100.0
3.2	90.6	AC	2380	-920	27.5		6.9 100.0
3.4	96.3	AC	2505	-885	26.1		6.9 100.0
3.8	107.6	AC	2685	0	0		8.3 120.0
3.9	111.9	BLDC	2320Z	-900	26.6		4.1 60.0
4.5	127.0	AC	2680	-920	27.2		6.9 100.0
4.6	130.3	AC	2660	-980	29.0		3.1 45.0
7.5	212.4	AC	2755	-980	29.0		12.1 175.0
7.5	212.4	AC	2775	-900	26.6		6.9 100.0

in. Hg 30 25 20 15 10 5 0 25 50 75 100 125 150 175 200 psi
mbar 1000 800 600 400 200 2 4 6 8 10 12 14 bar


Series Selection

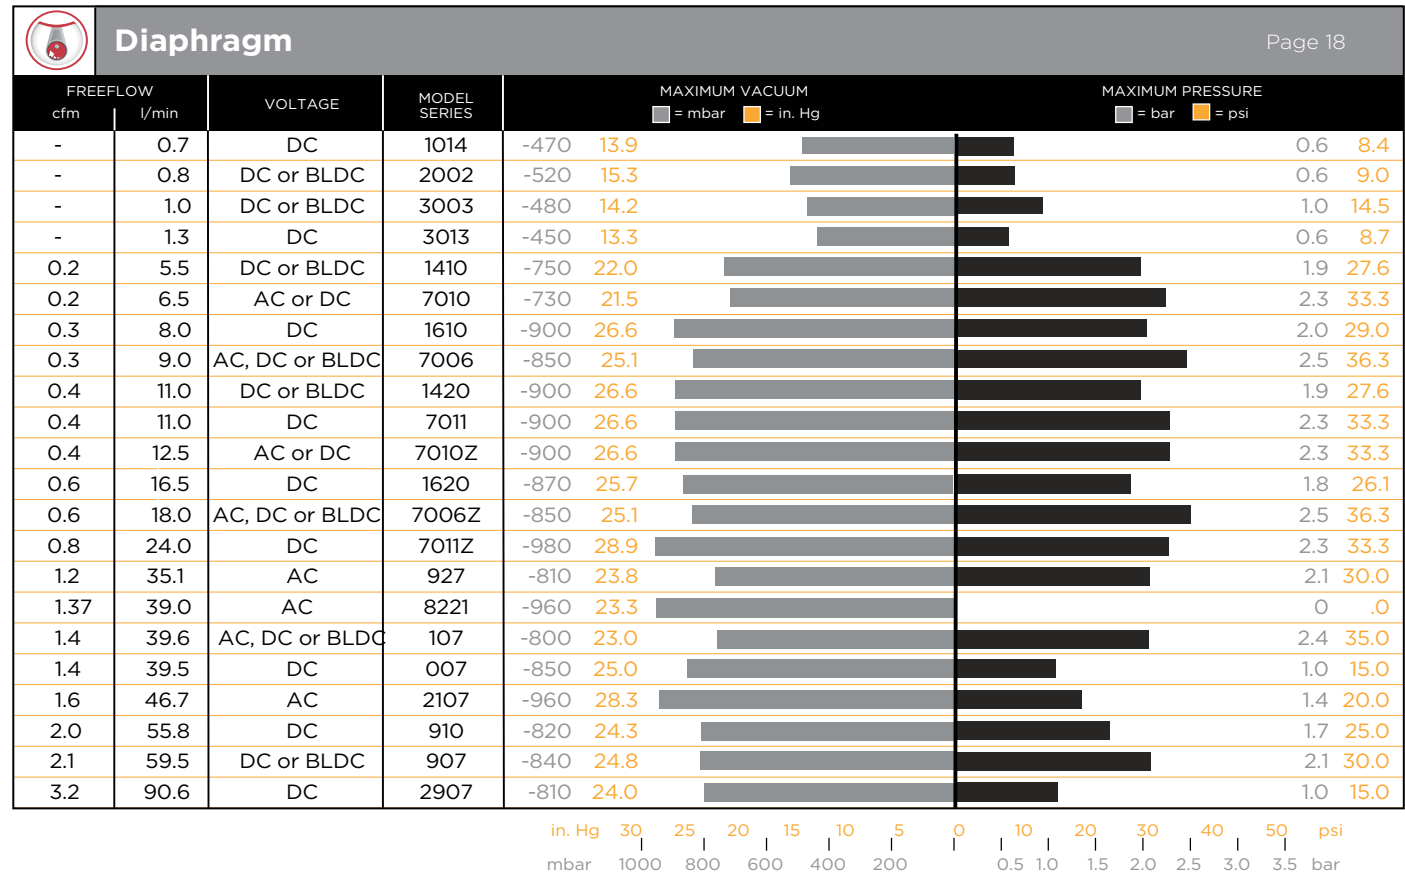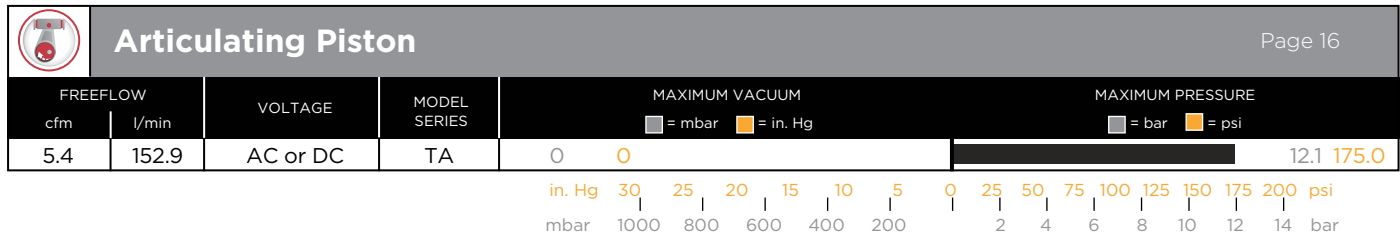




Series Selection

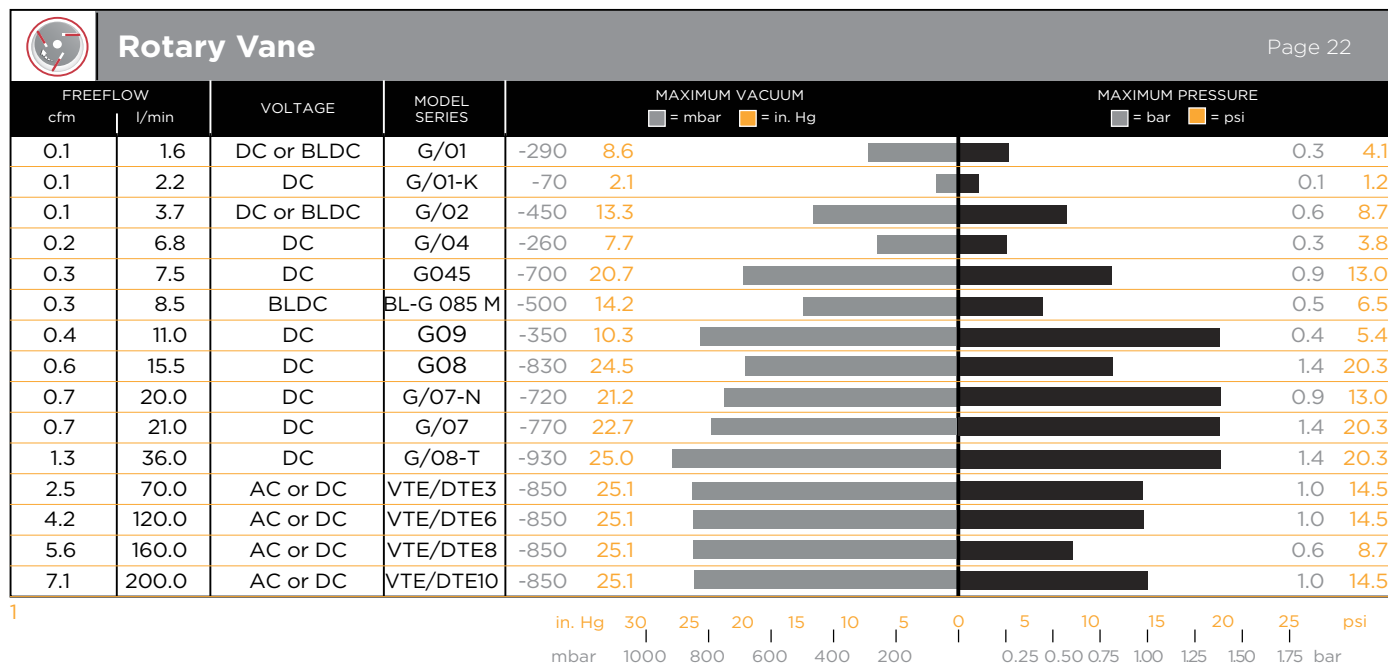

Series Selection

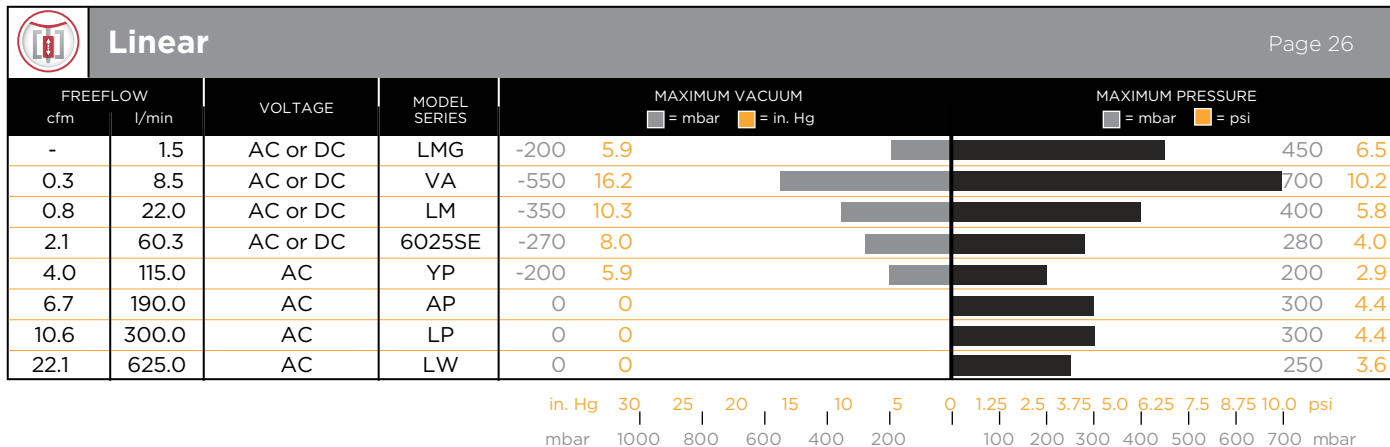

Series Selection

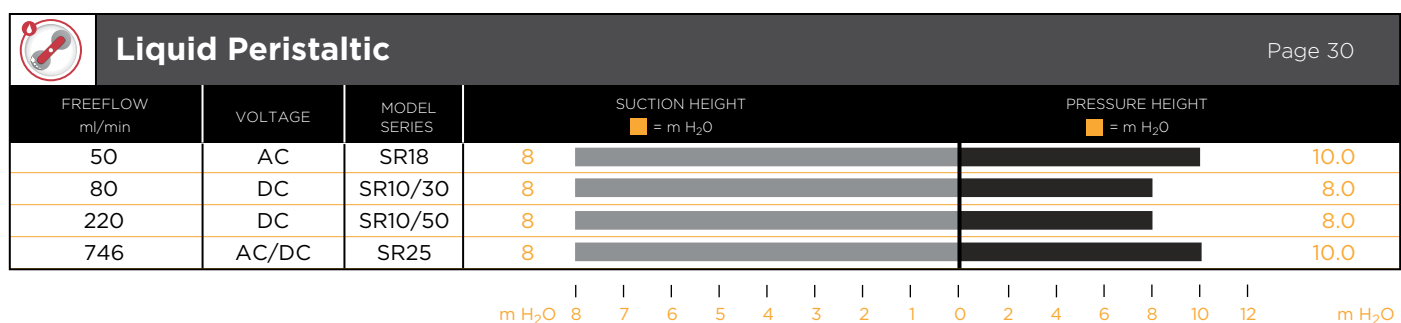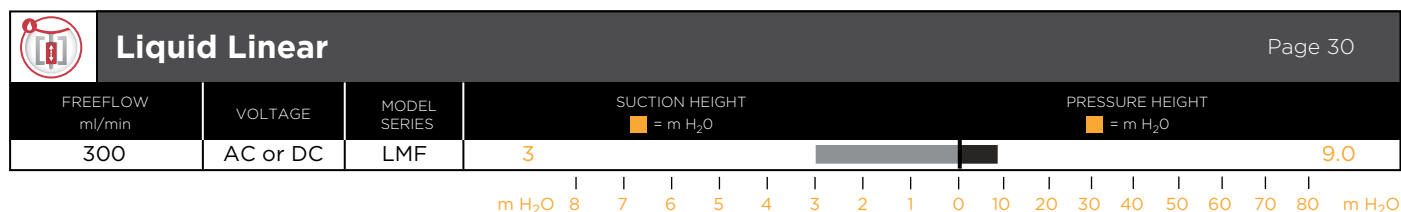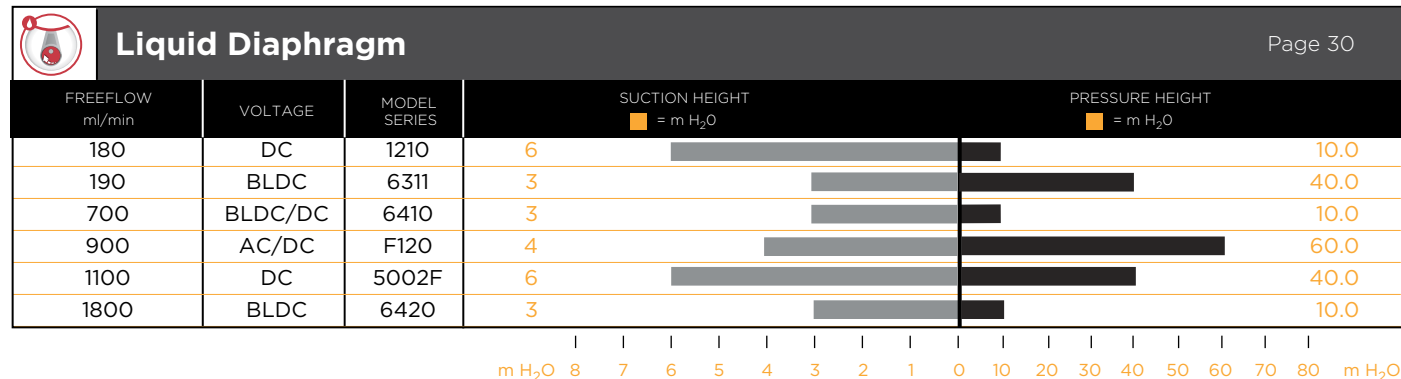


Model Selection

8003 BLDC



8006 AC



8009 DC



115ADC



135SDC



230Z



3D19



380Z


WOB-L® Piston

Pressure												
MODEL	MOTOR CAPACITY		FLOW l/min @ bar								MAXIMUM PRESSURE bar	
	VOLTAGE	TYPE*	0.0	0.5	1.0	1.5	2.0	3.0	5.0	7.0	CONTINUOUS	INTERMITTENT
8003D	12,24	PM	4.3	3.1	2.1	1.3	-	-	-	-	1.0	2.0
8003ZDP	12	PM	5.4	2.8	1.6	0.8	-	-	-	-	0.3	2.0
8003V	12,24	PM	-	-	-	-	-	-	-	-	-	-
8003ZVR	12	PM	-	-	-	-	-	-	-	-	-	-
8005D	12,24	PM	7.2	5.7	4.3	3.2	2.4	-	-	-	1.5	2.5
8005D	230/50/1	SP	6.0	4.8	3.7	2.8	2.0	-	-	-	1.5	2.5
8005V	12,24	PM	-	-	-	-	-	-	-	-	-	-
8005V	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
8006D	12,24	PM	15.8	12.2	9.3	6.9	4.8	1.3	-	-	1.0	3.0
8006D	230/50/1	PSC	15.8	12.6	10.1	7.6	5.5	2.0	-	-	1.0	3.0
8006V	12,24	PM	-	-	-	-	-	-	-	-	-	-
8006V	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
8006ZVP	12,24	PM	-	-	-	-	-	-	-	-	-	-
8006ZVP	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
8006ZVR	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
8009D	12,24	PM	14.0	11.5	9.0	8.0	7.1	5.6	3.2	1.8	1.0	7.0
8009D	230/50/1	PSC	11.8	10.4	9.4	8.5	7.6	6.2	4.2	2.9	1.0	7.0
8009ZD	24	PM	24.5	21.6	19.1	17.2	15.3	13.4	10.2	7.0	1.0	7.0
8009ZD	230/50/1	PSC	22.4	19.9	17.8	16.1	14.4	11.9	8.2	5.4	1.0	7.0

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.


WOB-L® Piston

Pressure												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
115ADC56/	12 or 24	PM	0.48	0.44	0.39	0.36	0.29	0.25	0.21	0.16	-	120.0
135ADC56/	12 or 24	PM	0.54	0.51	0.48	0.42	0.38	0.27	0.22	0.17	-	87.0
135SDC56/	12 or 24	PM	0.54	0.51	0.48	0.42	0.38	0.27	0.22	0.17	-	87.0
215ADC38/	12 or 24	PM	0.97	0.92	0.87	0.76	0.61	0.46	0.38	0.30	-	120.0
230ZA30/12	12	BLDC	0.74	0.57	0.54	0.46	-	-	-	-	30.0	30.0
250ZC35/24	24	BLDC	1.00	0.90	0.86	0.79	-	-	-	-	30.0	30.0
260ZC35/24	24	BLDC	1.77	1.62	1.49	1.23	-	-	-	-	30.0	30.0
309CDC56/12	12	PM	0.85	0.82	0.73	0.70	0.60	0.53	0.45	0.42	-	160.0
309DDC56/12	12	PM	0.85	0.82	0.73	0.70	0.60	0.53	0.45	0.42	-	134.0
3191250IRBLSCE	12	PM	1.25	1.20	1.15	1.05	0.90	0.79	0.71	0.65	-	120.0
380CE32	115/60/1	PSC	1.20	1.15	1.10	0.98	0.78	0.60	0.45	0.30	100.0	100.0
380CGHI32	20/50/60/1	PSC	1.20	1.15	1.10	0.98	0.78	0.60	0.45	0.30	100.0	100.0
380CS32	100/50/60/1	PSC	1.20	1.15	1.10	0.98	0.78	0.60	-	-	60.0	60.0
380ZC32/	24 or 48	BLDC	1.55	1.48	1.42	1.31	1.08	0.86	0.66	0.47	100.0	60.0
3D191250IRLSLCE	12	PM	1.27	1.22	1.18	1.09	0.93	0.83	0.73	0.68	-	120.0
405AA38	115/60/1	SP	0.29	0.27	0.24	0.17	-	-	-	-	20.0	40.0
405AD38	220/50/1	SP	0.26	0.24	0.19	0.17	0.14	-	-	-	20.0	40.0
405ADC38/	12 or 24	PM	0.79	0.77	0.75	0.71	0.56	0.38	0.33	0.24	100.0	100.0
415CDC30/	12 or 24	PM	0.92	0.87	0.81	0.71	0.56	0.44	0.34	0.25	100.0	100.0
415ZC36/24	24	BLDC	.64	0.59	0.55	0.51	0.42	0.38	0.34	0.31	100.0	100.0

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

Model Selection


WOB-L® Piston

Vacuum											
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
8003D	12, 24	-	-	-	-	-	-	-	-	54 x 30 x 82	0.19
8003ZDP	12	PM	-	-	-	-	-	-	-	53 x 30 x 123	0.28
8003V	12,24	PM	4.3	3.5	2.8	1.5	0.2	-	-650	54 x 30 x 82	0.19
8003ZVR	12	PM	2.9	2.5	2.0	1.2	0.6	-	-800	53 x 30 x 123	0.28
8005D	12,24	PM	-	-	-	-	-	-	-	75 x 96 x 118	1.1
8005D	230/50/1	SP	-	-	-	-	-	-	-	75 x 106 x 110	1.1
8005V	12,24	PM	7.2	6.0	4.8	3.0	1.4	-	-780	75 x 96 x 118	1.1
8005V	230/50/1	SP	6.0	4.9	3.8	2.4	1.2	-	-780	75 x 106 x 110	1.1
8006D	12,24	PM	-	-	-	-	-	-	-	100 x 71 x 146	1.2
8006D	230/50/1	PSC	-	-	-	-	-	-	-	114 x 78 x 147	1.5
8006V	12,24	PM	15.8	13.4	11.1	6.2	3.6	-	-800	100 x 71 x 146	1.2
8006V	230/50/1	SP	14.2	12.0	9.7	6.0	3.0	-	-800	110 x 71 x 131	1.5
8006ZVP	12,24	PM	31.0	25.0	20.0	11.7	5.1	-	-800	99 x 63 x 191	0.9
8006ZVP	230/50/1	PSC	29.0	24.9	20.7	12.9	6.2	-	-800	114 x 78 x 193	2.0
8006ZVR	230/50/1	PSC	14.2	12.0	10.5	7.0	4.0	1.5	-950	114 x 78 x 193	2.0
8009D	12,24	PM	-	-	-	-	-	-	-	104 x 63 x 145	1.1
8009D	230/50/1	PSC	-	-	-	-	-	-	-	108 x 91 x 153	1.7
8009ZD	24	PM	-	-	-	-	-	-	-	105 x 70 x 177	2.1
8009ZD	230/50/1	PSC	-	-	-	-	-	-	-	108 x 110 x 195	2.5


*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.


8003 Z



8005 DC



8009 ZDC



WOB-L® Piston

Vacuum											
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb
	VOLTAGE	TYPE*	0	5	10	15	20	25			
115ADC56/	12 or 24	PM	-	-	-	-	-	-	-	5.13 x 1.01 x 5.27	1.6
135ADC56/	12 or 24	PM	-	-	-	-	-	-	-	3.60 x 1.66 x 4.34	1.2
135SDC56/	12 or 24	PM	-	-	-	-	-	-	-	4.13 x 1.66 x 4.34	1.3
215ADC38/	12 or 24	PM	-	-	-	-	-	-	-	4.46 x 2.10 x 6.18	3.0
230ZA30/12	12	BLDC	-	-	-	-	-	-	-	3.80 x 2.64 x 3.63	1.2
250ZC35/24	24	BLDC	1.00	0.80	0.59	0.38	0.18	-	24.2	4.54 x 3.02 x 4.14	2.4
260ZC35/24	24	BLDC	1.77	1.30	0.94	0.60	0.26	0.03	25.5	4.63 x 3.02 x 4.12	2.8
309CDC56/12	12	PM	0.75	0.61	0.48	0.34	0.21	0.09	26.7	6.14 x 4.00 x 7.65	5.1
309DDC56/12	12	PM	-	-	-	-	-	-	-	6.79 x 5.26 x 9.08	6.4
3191250IRBLSCE	12	PM	1.25	0.84	0.62	0.43	0.27	0.07	27.0	6.14 x 4.00 x 7.46	5.1
380CE32	115/60/1	PSC	1.20	0.97	0.75	0.52	0.29	0.06	26.2	6.73 x 5.14 x 6.99	9.7
380CGHI32	230/50/60/1	PSC	1.20	0.97	0.75	0.52	0.29	0.06	26.2	6.73 x 5.14 x 8.40	9.95
380CS32	100/50/60/1	PSC	1.20	0.97	0.75	0.52	0.29	0.06	26.2	6.73 x 5.14 x 8.40	9.95
380ZC32/	24 or 48	BLDC	1.54	1.24	0.94	0.65	0.37	0.09	25.8	6.72 x 5.14 x 6.94	6.94
3D191250IRBLSCE	12	PM	-	-	-	-	-	-	-	6.82 x 5.26 x 9.12	6.4
405AA38	115/60/1	SP	-	-	-	-	-	-	-	5.30 x 4.25 x 6.74	5.5
405AD38	230/50/1	SP	-	-	-	-	-	-	-	5.30 x 4.25 x 6.74	5.5
405ADC38/	12 or 24	PM	-	-	-	-	-	-	-	5.30 x 4.26 x 7.29	4.3
415CDC30/	12 or 24	PM	0.92	0.75	0.54	0.34	0.20	-	24.6	5.35 x 4.25 x 7.29	5.0
415ZC36/24	24	BLDC	0.64	0.49	0.39	0.28	0.18	0.08	27.0	5.88 x 4.25 x 6.04	3.6

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

260Z



319



380



Model Selection



WOB-L® Piston

Pressure												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
617CA22	115/60/1	SP	0.78	0.74	0.69	0.59	0.42	0.31	0.18	0.07	100.0	100.0
617CA32	115/60/1	SP	1.22	1.19	1.10	0.97	0.74	0.56	-	-	50.0	60.0
617CD22	220/50/1	SP	0.69	0.65	0.59	0.50	0.35	0.25	0.17	0.10	100.0	100.0
617CD32	220/50/1	SP	1.01	0.97	0.91	0.80	0.59	-	-	-	40.0	40.0
660E48XNTLSXX	115/60/1	PSC	2.40	2.31	2.20	2.01	1.65	-	-	-	45.0	45.0
660N48XNTLSXX	220-240/50/60/1	PSC	2.40	2.31	2.20	2.01	1.65	-	-	-	45.0 (50Hz), 50.0 (60Hz)	45.0 (50Hz), 50.0 (60Hz)
660S48XNTLSXX	100/50/60/1	PSC	2.40	2.31	2.20	2.01	1.65	-	-	-	30.0 (50Hz), 50.0 (60Hz)	30.0 (50Hz), 50.0 (60Hz)
668E44XNTLSXX	115/60/1	PSC	1.61	1.56	1.52	1.39	1.19	1.01	0.84	0.71	100.0	100.0
668N44XNTLSXX	220-240/50/60/1	PSC	1.61	1.56	1.52	1.39	1.19	1.01	0.84	0.71	100.0	100.0
668S44XNTLSXX	100/50/60/1	PSC	1.61	1.56	1.52	1.39	1.19	1.01	0.84	0.71	100.0	100.0
2110ZA26/12	12	BLDC	0.50	.048	0.45	0.40	-	-	-	-	30.0	30.0
2110ZA26/12M	12	BLDC	0.50	.048	0.45	0.40	-	-	-	-	30.0	30.0
2220ZA30/12	12	BLDC	1.14	1.09	1.06	1.00	-	-	-	-	30.0	30.0
2250ZC35/24	24	BLDC	1.15	0.97	0.89	0.82	-	-	-	-	30.0	30.0
2320ZC36	150V DC	BLDC	3.95	3.70	3.57	3.22	2.53	1.97	-	-	60.0	60.0
2380BES44	115/60/1, 100/50/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2380BGUU44	230/60/1, 230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
2380CE32	115/60/1	PSC	2.30	2.19	2.04	1.84	1.48	1.19	0.89	0.61	100.0	100.0
2380CS32	100/50/60/1	PSC	2.30	2.19	2.04	1.84	1.48	1.19	0.89	0.61	100.0	100.0
2380CUU32	230/50/1	PSC	2.00	1.88	1.71	1.58	1.24	0.96	0.71	0.47	100.0	100.0
2380CE38	115/60/1	PSC	2.70	2.62	2.45	2.20	1.75	1.35	-	-	75.0	75.0
2380CUU38	230/50/1	PSC	2.30	2.21	2.10	1.90	1.50	1.10	-	-	75.0	75.0
2380CE44	115/60/1	PSC	3.20	3.10	2.90	2.60	2.13	-	-	-	30.0	30.0
2380CUU44	230/50/1	PSC	2.70	2.60	2.49	2.23	1.80	-	-	-	30.0	30.0
2380ZC32/	12 or 24	BLDC	3.14	2.99	2.86	2.59	2.10	1.66	1.27	0.93	100.0	100.0
2450AE44	115/60/1	PSC	3.00	2.87	2.70	2.57	2.45	-	-	-	30.0	30.0
2450AUU44	230/50/1	PSC	2.60	2.50	2.37	2.11	-	-	-	-	30.0	30.0
2505CE38	115/60/1	PSC	3.40	3.23	3.06	2.77	2.22	1.75	1.25	0.75	100.0	100.0
2505CG38	230/60/1	PSC	3.40	3.32	3.03	2.72	2.16	1.67	-	-	60.0	60.0
2505CHI45	220-240/50/1	PSC	3.40	3.27	3.05	2.78	-	-	-	-	30.0	30.0

*SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC, CS = Capacitor Start

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

2110Z



2250Z




2380



2380Z



2450



Model Selection

WOB-L® Piston

Vacuum											
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM % local barometer in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
617CA22	115/60/1	SP	0.78	0.63	0.47	0.31	0.16	0.02	25.6	6.77 x 5.00 x 7.89	11.0
617CA32	115/60/1	SP	1.22	0.87	0.65	0.45	0.23	-	26.8	6.77 x 5.00 x 7.89	11.0
617CD22	230/50/1	SP	0.69	0.53	0.40	0.26	0.14	-	25.6	6.77 x 5.00 x 7.89	11.0
617CD32	230/50/1	SP	1.01	0.75	0.55	0.35	0.19	-	26.2	6.77 x 5.00 x 7.89	11.0
660E48XNTLSXX	115/60/1	PSC	2.40	1.81	1.40	1.01	0.58	0.19	92%	7.19 x 5.18 x 7.09	14.4
660N48XNTLSXX	220-240/50/60/1	PSC	2.40	1.81	1.40	1.01	0.58	0.19	92%	7.19 x 5.18 x 7.09	13.5
660S48XNTLSXX	100/50/60/1	PSC	2.40	1.81	1.40	1.01	0.58	0.19	92%	7.19 x 5.18 x 7.09	14.4
668E44XNTLSXX	115/60/1	PSC	1.61	1.30	0.99	0.71	0.41	0.13	93%	7.19 x 5.18 x 7.09	13.3
668N44XNTLSXX	220-240/50/60/1	PSC	1.61	1.30	0.99	0.71	0.41	0.13	93%	7.19 x 5.18 x 7.09	13.3
668S44XNTLSXX	100/50/60/1	PSC	1.61	1.30	0.99	0.71	0.41	0.13	93%	7.19 x 5.18 x 7.09	13.3
2110ZA26/12	12	BLDC	-	-	-	-	-	-	-	2.99 x 2.20 x 3.54	0.85
2110ZA26/12M	12	BLDC	-	-	-	-	-	-	-	2.99 x 2.20 x 3.54	0.72
2220ZA30/12	12	BLDC	-	-	-	-	-	-	-	3.77 x 2.64 x 4.70	1.5
2250ZC35/24	24	BLDC	1.92	1.43	1.06	0.74	0.39	0.94	25.9	4.27 x 3.10 x 6.05	2.8
2320ZC36	150V DC	BLDC	3.95	2.88	2.12	1.45	0.82	0.20	90%	6.03 x 3.71 x 6.841	7.5
2380BES44	115/60/1, 100/50/60/1	PSC	3.00	2.50	1.90	1.30	0.70	0.20	91%	6.79 x 5.14 x 9.31	12.0
2380BGU44	230/60/1, 230/50/1	PSC	3.00	2.50	1.90	1.30	0.70	0.20	91%	6.79 x 5.14 x 9.31	12.0
2380CE32	115/60/1	PSC	2.30	1.94	1.46	1.01	0.57	0.16	90%	6.73 x 5.14 x 9.31	12.0
2380CS32	100/50/60/1	PSC	2.30	1.94	1.46	1.01	0.57	0.16	90%	6.73 x 5.14 x 9.31	12.0
2380CUU32	230/50/1	PSC	2.00	1.67	1.26	0.86	0.48	0.13	90%	6.73 x 5.14 x 9.31	12.0
2380CE38	100/50/60/1	PSC	2.70	2.15	1.63	1.12	0.65	0.16	91%	6.76 x 5.14 x 9.31	12.0
2380CUU38	230/50/1	PSC	2.30	1.85	1.40	0.95	0.52	0.10	91%	6.76 x 5.14 x 9.31	12.0
2380CE44	115/60/1	PSC	3.20	2.50	1.88	1.31	0.75	0.24	92%	6.79 x 5.14 x 8.94	12.0
2380CUU44	230/50/1h	PSC	2.70	2.25	1.70	1.23	0.72	0.23	92%	6.79 x 5.14 x 8.94	12.0
2380ZC32/	24 or 48	BLDC	3.00	2.40	1.82	1.26	0.71	0.18	90%	6.72 x 5.14 x 9.31	9.36
2450AE44	115/60/1	PSC	-	-	-	-	-	-	-	6.41 x 3.90 x 8.32	9.5
2450AUU44	230/50/1	PSC	-	-	-	-	-	-	-	6.41 x 3.90 x 8.32	9.5
2505CE38	115/60/1	PSC	3.40	2.69	2.04	1.37	0.74	0.17	90%	6.51 x 4.64 x 9.34	14.0
2505CG38	230/60/1	PSC	3.40	2.64	1.93	1.30	0.60	0.13	90%	6.51 x 4.64 x 9.34	14.0
2505CHI45	220-240/50/1	PSC	3.40	2.63	1.98	1.37	0.66	0.15	90%	6.51 x 4.64 x 9.34	14.0

SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC, CS = Capacitor Start

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

617



668



2320Z



2505




Model Selection



WOB-L® Piston

2660



2680CWW40



2685PE40



Pressure												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
2660E48XNTLSXX	115/60/1	PSC	4.60	4.43	4.25	3.92	3.63	-	-	-	40.0	40.0
2660N48XNTLSXX	220-240/50/60/1	PSC	4.60	4.43	4.25	3.92	3.63	-	-	-	45.0	45.0
2660S48XNTLSXX	100/50/60/1	PSC	4.60	4.43	4.25	3.92	-	-	-	-	25.0 (50Hz), 20.0 (60Hz)	25.0 (50Hz), 20.0 (60Hz)
2668E44XNTLSXX	115/60/1	PSC	3.06	2.95	2.89	2.65	2.24	1.88	1.57	1.32	100.0	100.0
2668N44XNTLSXX	220-240/50/60/1	PSC	3.06	2.95	2.89	2.65	2.24	1.88	1.57	1.32	100.0	100.0
2668S44XNTLSXX	100/50/60/1	PSC	3.06	2.95	2.89	2.65	2.24	1.88	1.57	1.32	100.0	100.0
2680CWW40	200-240/50/1, 100-127/60/1	PSC	4.50	4.30	4.11	3.72	3.15	2.60	2.23	1.83	100.0	100.0
2685PE40	115/60/1	PSC	3.86	3.70	3.50	3.15	2.60	2.19	1.75	1.44	100.0	120.0
2685PHI44	220-240/50/1	PSC	3.35	3.22	3.15	2.78	2.25	1.85	1.43	1.09	100.0	120.0
2688TE44/38	115/60/1	PSC	1.52	1.48	1.45	1.41	1.35	1.32	1.30	1.28	160.0	160.0
2688TGH44/38	220-240/50/1, 230/60/1	PSC	1.52	1.48	1.45	1.41	1.35	1.32	1.30	1.28	160.0	160.0
2688VE44	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2688VGH44	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2688VS44	100/50/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2755BE75	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2755BGHI75	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2755CE60	115/60/1	PSC	6.50	6.23	5.98	5.40	-	-	-	-	15.0	15.0
2755CGHI60	220-240/50/1, 230/60/1	PSC	5.60	5.32	5.10	4.60	-	-	-	-	20.0	20.0
2755TE48/40	115/60/1	PSC	2.60	2.50	2.40	2.22	2.00	1.95	1.90	1.85	160.0	160.0
2755TGH52/48	220-240/50/1, 230/60/1	PSC	2.75	2.60	2.50	2.40	2.20	2.14	2.08	2.03	175.0	175.0
2755VEF75	115/60/1, 110/50/1	PSC	-	-	-	-	-	-	-	-	-	-
2755VHI75	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
2775CE50	115/60/1	PSC	5.50	5.30	5.05	4.59	3.78	3.09	2.47	1.96	100.0	120.0
2775CE70	115/60/1	PSC	7.20	6.95	6.80	6.50	5.7				45.0	100.0
2775CE75	115/60/1	PSC	7.50	7.31	7.13	6.81					30.0	40.0
2775CGHI50	220-240/50/1, 230/60/1	PSC	5.50	5.30	5.05	4.59	3.78	3.09	2.47	1.96	100.0	120.0
2775CGUU70	230/50/60/1	PSC	7.20	6.80	6.60	6.10	5.2				45.0	70.0

*PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

Model Selection

WOB-L® Piston


Vacuum											
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM % local barometer in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
2660E48XNTLSXX	115/60/1	PSC	4.60	3.61	2.75	1.93	1.11	0.34	92%	7.09 x 5.18 x 9.31	17.6
2660N48XNTLSXX	220-240/50/60/1	PSC	4.60	3.61	2.75	1.93	1.11	0.34	92%	7.09 x 5.18 x 9.31	17.1
2660S48XNTLSXX	100/50/60/1	PSC	4.60	3.61	2.75	1.93	1.11	0.34	92%	7.09 x 5.18 x 9.31	17.6
2668E44XNTLSXX	115/60/1	PSC	3.06	2.42	1.81	1.22	0.65	0.11	93%	7.09 x 5.18 x 9.31	16.0
2668N44XNTLSXX	220-240/50/60/1	PSC	3.06	2.42	1.81	1.22	0.65	0.11	93%	7.09 x 5.18 x 9.31	16.0
2668S44XNTLSXX	100/50/60/1	PSC	3.06	2.42	1.81	1.22	0.65	0.11	93%	7.09 x 5.18 x 9.31	16.0
2680CWW40	200-240/50/1, 100-127/60/1	PSC	4.50	3.55	2.69	1.83	1.08	.32	92%	7.09 x 5.38 x 10.57	20.9
2685PE40	115/60/1	PSC	-	-	-	-	-	-	-	7.19 x 5.38 x 9.77	16.4
2685PHI44	220-240/50/1	PSC	-	-	-	-	-	-	-	7.09 x 5.38 x 9.77	16.4
2688TE44/38	115/60/1	PSC	-	-	-	-	-	-	-	7.39 x 6.68 x 9.73	16.0
2688TGH144/38	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	7.39 x 6.68 x 9.73	15.0
2688VE44	115/60/1	PSC	1.60	1.20	0.98	0.69	0.48	0.16	29.0	7.40 x 6.61 x 9.73	16.4
2688VGHI44	220-240/50/1, 230/60/1	PSC	1.60	1.20	0.98	0.69	0.48	0.16	29.0	7.40 x 6.61 x 9.73	14.6
2688VS44	100/50/60/1	PSC	1.60	1.20	0.98	0.69	0.48	0.16	29.0	7.40 x 6.61 x 9.73	16.4
2755BE75	115/60/1	PSC	7.50	6.21	4.73	3.29	1.87	0.53	93%	9.32 x 5.37 x 10.35	21.5
2755BGHI75	220-240/50/1, 230/60/1	PSC	6.60	5.27	4.7	3.2	1.8	0.5	93%	9.32 x 5.37 x 10.35	22.6
2755CE60	115/60/1	PSC	6.50	5.29	4.02	2.72	1.49	0.31	91%	9.32 x 5.37 x 10.35	21.5
2755CGHI60	220-240/50/1, 230/60/1	PSC	5.60	4.50	3.37	2.31	1.28	0.28	91%	9.32 x 5.37 x 10.35	22.6
2755TE48/40	115/60/1	PSC	-	-	-	-	-	-	-	9.32 x 5.37 x 10.75	21.7
2755TGH152/48	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	9.32 x 5.37 x 10.75	23.0
2755VEF75	115/60/1, 110/50/1	PSC	3.90	3.21	2.51	1.86	1.16	0.49	98%	9.32 x 5.37 x 10.35	21.5
2755VHI75	230/50/1	PSC	3.14	2.65	2.05	1.48	0.90	0.40	98%	9.32 x 5.37 x 10.35	22.6
2775CE50	115/60/1	PSC	5.50	3.92	2.96	2.02	1.12	0.27	90%	9.80 x 6.10 x 12.40	23.8
2775CE70	115/60/1	PSC	7.2	4.81	3.69	2.55	1.43	0.36	91%	9.80 x 6.10 x 12.40	23.8
2775CE75	115/60/1	PSC	7.5	5.2	3.94	2.75	1.67	0.41	91%	9.80 x 6.10 x 12.40	23.8
2775CGHI50	220-240/50/1, 230/60/1	PSC	5.50	3.92	2.96	2.55	1.12	0.27	90%	9.80 x 6.10 x 12.40	23.8
2775CGUU70	230/50/60/1	PSC	7.2	4.96	3.87	2.64	1.56	0.45	91%	9.80 x 6.10 x 12.40	23.8

*PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

2668



2755



2775



Model Selection



Articulated Piston

TA-3101 DC
TA-4101 DC



TA-3101
TA-4101



Pressure

MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
TA-3101-DC (270024)	12V DC	PM	1.70	1.62	1.55	1.40	1.18	1.00	0.85	0.70	100.0	100.0
TA-4101-DC (270025)	12V DC	PM	2.20	2.07	1.95	1.75	1.45	1.25	1.10	0.95	100.0	100.0
TA-4101-DC (270047)	24V DC	PM	2.20	2.07	1.95	1.75	1.45	1.25	1.10	0.95	100.0	100.0
TA-5102-DC (270058)	12V DC	PM	4.06	3.81	3.54	3.42	3.02	2.72	2.12	1.61	100.0	100.0
TA-3051 (270002)	115/230/60/1	CS	2.00	1.92	1.85	1.70	1.50	-	-	-	50.0	50.0
TA-3101 (270005)	115/230/60/1	CS	1.60	1.50	1.40	1.25	1.03	0.85	0.66	0.60	100.0	100.0
TA-4101 (270015)	115/230/60/1	CS/CR	2.20	2.12	2.05	1.90	1.65	1.45	1.25	1.10	100.0	100.0
TA-4102 (270010)	115/230/60/1	CS	2.60	2.54	2.44	2.20	1.80	1.60	1.35	1.20	50.0	50.0
TA-4172 (270072)	115/230/60/1	CS	1.40	1.38	1.35	1.35	1.30	1.25	1.20	1.15	175.0	175.0
TA-5102 (270011)	115/230/60/1	CS	3.20	3.05	2.90	2.68	2.40	2.10	1.90	1.65	100.0	100.0
TA-5102 (270040)	110/220-240/50/1	CS	2.55	2.42	2.30	2.15	1.90	1.70	1.50	1.30	100.0	100.0
TA-5102 (270043)	190/380 208-230/460	POLY	3.20	3.05	2.90	2.68	2.40	2.10	1.90	1.65	100.0	100.0
TA-5172 (270073)	115/230/60/1	CS	1.80	1.79	1.79	1.78	1.75	1.72	1.69	1.65	175.0	175.0
TA-5172 (270078)	110/220-240/50/1	CS	1.43	1.42	1.42	1.41	1.39	1.37	1.35	1.32	175.0	175.0
TA-6102 (270012)	115/230/60/1	CS	4.30	4.15	4.00	3.75	3.30	2.95	2.60	2.40	100.0	100.0
TA-6102 (270044)	190/380 208-230/460	POLY	4.30	4.15	4.00	3.75	3.30	2.95	2.60	2.40	100.0	100.0
TA-6172 (270080)	115/230/60/1	CS/CR	2.40	2.39	2.39	2.37	2.34	2.31	2.28	2.25	175.0	175.0
TA-6172 (270082)	190/380 208-230/460	POLY	1.92	1.91	1.90	1.89	1.86	1.84	1.81	1.79	175.0	175.0
TA-7102 (270045)	115/230/60/1	CS/CR	5.40	5.30	5.20	5.00	4.60	4.20	3.75	3.30	100.0	100.0

*PM = Permanent Magnet, CS = Capacitor Start, CS/CR = Capacitor start/run, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection



Articulated Piston

Vacuum											
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
TA-3101-DC (270024)	12	PM	-	-	-	-	-	-	-	8.61 x 5.83 x 11.54	22.0
TA-4101-DC (270025)	12	PM	-	-	-	-	-	-	-	8.61 x 5.83 x 11.54	22.0
TA-4101-DC (270047)	24	PM	-	-	-	-	-	-	-	8.61 x 5.83 x 11.54	25.0
TA-5102-DC (270058)	12	PM	-	-	-	-	-	-	-	6.81 x 9.96 x 15.32	40.0
TA-3051 (270002)	115/230/60/1	CS	-	-	-	-	-	-	-	8.10 x 5.75 x 12.11	21.0
TA-3101 (270005)	115/230/60/1	CS	-	-	-	-	-	-	-	8.10 x 5.75 x 12.11	21.0
TA-4101 (270015)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	8.10 x 5.75 x 12.05	24.0
TA-4102 (270010)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 10.20 x 11.49	36.0
TA-4172 (270072)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 11.20 x 14.30	45.0
TA-5102 (270011)	115/230/60/1	CS	-	-	-	-	-	-	-	6.91 x 10.59 x 14.30	37.0
TA-5102 (270040)	110/220-240/50/1	CS	-	-	-	-	-	-	-	9.04 x 10.83 x 16.30	37.0
TA-5102 (270043)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.95 x 10.71 x 14.13	37.0
TA-5172 (270073)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 11.59 x 14.30	51.0
TA-5172 (270078)	110/220-240/50/1	CS	-	-	-	-	-	-	-	9.04 x 11.20 x 16.30	51.0
TA-6102 (270012)	115/230/60/1	CS	-	-	-	-	-	-	-	6.91 x 10.20 x 15.30	45.0
TA-6102 (270044)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.91 x 10.20 x 15.30	45.0
TA-6172 (270080)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	6.95 x 11.20 x 14.30	56.0
TA-6172 (270082)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.95 x 11.20 x 14.30	56.0
TA-7102 (270045)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	7.44 x 11.77 x 16.11	61.0


*PM = Permanent Magnet, CS = Capacitor Start, CS/CR = Capacitor start/run, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

TA-5102 DC



TA-6102



Model Selection



Diaphragm

1010 DC




1410 DC




1610



7006 DC



7010 DC



Pressure												
MODEL	MOTOR CAPACITY		FLOW l/min @ bar								MAXIMUM PRESSURE bar	
	VOLTAGE	TYPE*	0.0	0.5	1.0	1.5	2.0	3.0	5.0	7.0	CONTINUOUS	INTERMITTENT
1014	2.5 - 4	PM	0.7	0.6	-	-	-	-	-	-	0.6	0.6
2002	2.0 - 12	PM	0.8	0.1	-	-	-	-	-	-	0.2	0.6
3003	4.5 - 12	PM	1.0	0.1	-	-	-	-	-	-	0.2	0.6
3013	4.5 - 12	PM	1.3	0.1	-	-	-	-	-	-	0.2	0.6
1410D	12, 24	PM	5.5	2.5	-	-	-	-	-	-	1.0	1.0
1410VD	12, 24	PM	4.3	2.5	1.4	0.6	-	-	-	-	0.7	1.9
1420DP	12, 24	PM	11.0	5.1	-	-	-	-	-	-	1.0	1.0
1420VDP	12,24	PM	8.2	6.0	3.9	1.7	-	-	-	-	0.7	1.9
1610	12,24	PM	8.0	6.3	4.1	1.7	0.0	-	-	-	0.5	2.0
1620	12,24	PM	16.5	12.3	7.9	3.7	-	-	-	-	0.25	1.8
7006	12,24	PM	7.2	5.3	3.9	2.8	1.9	-	-	-	0.8	2.5
7006	230/50/1	PSC	6.9	5.0	3.7	2.3	1.3	-	-	-	0.8	2.5
7006ZP	12,24	PM	13.8	9.4	7.1	5.5	4.1	-	-	-	0.8	2.5
7006ZP	230/50/1	PSC	13.8	9.4	7.1	5.5	4.1	-	-	-	0.8	2.5
7006ZVR	12,24	PM	-	-	-	-	-	-	-	-	-	-
7006ZVR	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
7010	12,24	PM	6.5	4.5	2.9	1.9	-	-	-	-	1.0	2.2
7010	115/60/1,230/50/1	SP	5.8	4.3	3.0	2.0	-	-	-	-	1.2	2.3
7010ZDP	12,24	PM	12.0	8.1	5.1	2.5	-	-	-	-	0.8	2.0
7010ZDP	115/60/1,230/50/1	SP	10.4	7.3	4.8	2.5	-	-	-	-	0.8	2.3
7010ZVR	12,24	PM	-	-	-	-	-	-	-	-	-	-
7010ZVR	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
7011	12,24	PM	12.4	8.1	5.3	3.5	1.5	-	-	-	0.8	2.3
7011ZP	12,24	PM	24.0	17.0	11.0	8.0	-	-	-	-	0.5	2.3
7011ZR	12,24	PM	-	-	-	-	-	-	-	-	-	-
8221	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-

*PM = Permanent Magnet, SP = Shaded Pole,

*PSC=Permanent Split Capacitor, Consult factory for 60 Hz models - minimum quantities apply.

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection



Diaphragm

Vacuum											
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
1014	2.5 - 4	PM	0.7	0.5	0.3	0.1	-	-	-470	23 x 14 x 33	0.02
2002	2.0 - 10	PM	0.8	0.6	0.4	-	-	-	-520	26 x 17 x 41	0.03
3003	4.5 - 12	PM	1.0	0.6	0.3	-	-	-	-380	37 x 23 x 43	0.04
3013	4.5 - 12	PM	1.3	0.7	0.4	0.1	-	-	-450	34 x 23 x 44	0.03
1410V	12,24	PM	5.5	4.6	3.9	2.4	1.0	-	-750	54 x 30 x 83	0.17
1410VD	12,24	PM	4.3	3.5	2.8	1.7	0.6	-	-730	54 x 30 x 83	0.17
1420VP	12,24	PM	11.0	9.5	8.0	5.0	2.1	-	-780	75 x 30 x 87	0.22
1420VDP	12,24	PM	8.2	7.0	5.8	3.2	1.0	-	-730	75 x 30 x 87	0.22
1610	12,24	PM	8.0	6.9	5.7	3.7	1.9	0.4	-900	97 x 47 x 120	0.64
1620	12,24	PM	16.5	14.4	12.1	7.8	4.0	0.7	-870	141 x 47 x 138	0.75
7006	12,24	PM	7.2	5.3	4.4	2.7	1.2	0.3	-850	78 x 47 x 123	0.60
7006	230/50/1	PSC	6.9	5.3	4.3	2.6	1.2	0.3	-850	110 x 79 x 141	1.6
7006ZP	12,24	PM	13.8	10.6	8.6	5.3	2.8	0.9	-850	78 x 47 x 123	0.9
7006ZP	230/50/1	PSC	13.8	10.6	8.6	5.3	2.8	0.9	-850	110 x 79 x 185	1.8
7006ZVR	12,24	PM	6.6	5.7	4.8	3.2	1.9	0.7	-950	78 x 47 x 123	0.90
7006ZVR	230/50/1	SP	7.1	6.0	5.0	3.3	1.9	0.6	-950	78 x 61 x 123	1.8
7010	12,24	PM	6.5	4.6	3.7	2.2	1.0	-	-730	86 x 48 x 120	0.60
7010	115/230/1	SP	5.8	4.5	3.5	2.1	0.9	-	-780	83 x 61 x 109	0.95
7010ZDP	12,24	PM	12.0	10.0	8.0	4.5	1.7	-	-750	82 x 48 x 161	0.75
7010ZDP	230/50/1	SP	10.4	8.6	7.0	4.2	1.8	-	-750	82 x 61 x 158	1.45
7010ZVR	12,24	PM	6.0	5.1	4.4	2.9	1.6	0.4	-900	82 x 48 x 161	0.75
7010ZVR	230/50/1	SP	5.3	4.5	3.7	2.4	1.3	0.3	-900	82 x 61 x 158	1.45
7011	12,24	PM	12.4	9.5	7.5	4.5	1.5	-	-730	62 x 87 x 150	0.85
7011ZP	12,24	PM	24.0	20.0	15.5	3.0	2.5	-	-700	48 x 97 x 194	1.4
7011ZR	12,24	PM	7.0	6.2	5.6	3.5	2.0	0.8	-990	48 x 97 x 192	1.4
8221	230/50/1	PSC	39.0	35.0	30.0	20.0	12.0	1.0	-960	159 x 129 x 261	5.2

*PM = Permanent Magnet, SP = Shaded Pole,

*PSC=Permanent Split Capacitor, Consult factory for 60 Hz models - minimum quantities apply.

Note: Minimum release quantities or regional availability may apply. Consult factory.

2002



3013



1420 BLDC



1620 VD



7011 DC



Model Selection



Diaphragm


107 AC



2107



2907



Pressure												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
007BDC19	12 or 24	PM	-	-	-	-	-	-	-	-	-	-
007CDC19	12 or 24	PM	0.75	0.62	0.50	-	-	-	-	-	15.0	25.0
107AB18XFTLBXX	100/50/1, 115/60/1	SP	0.70	0.60	0.50	0.30	-	-	-	-	20.0	25.0
107CDU18XFTLBXX	220-230/50/1, 230/60/1	SP	0.70	0.60	0.50	0.30	-	-	-	-	20.0	25.0
107ZC18/24	24	BLDC	0.96	0.77	0.63	0.40	-	-	-	-	35.0	35.0
107I220IFTLBXX	12	PM	1.44	1.30	1.15	0.85	-	-	-	-	35.0	35.0
907BDC22	12	PM	-	-	-	-	-	-	-	-	-	-
907CDC18	12	PM	2.05	1.67	1.30	0.72	-	-	-	-	30.0	30.0
907ZC18/24	24	BLDC	2.22	1.69	1.34	0.63	-	-	-	-	25.0	25.0
910CDC22/12	12	PM	1.97	1.72	1.47	1.10	0.48	-	-	-	25.0	40.0
927CA18	115/60/1	SP	1.24	1.11	0.96	0.65	0.24	-	-	-	30.0	40.0
927CD18	220/50/1	SP	1.15	1.00	0.87	0.61	0.21	-	-	-	30.0	40.0
2107A18XSTLNXX	115/60/1	SP	1.60	1.25	-	-	-	-	-	-	5.0	5.0
2107DU18XSTLNXX	220-230/50/1	SP	1.25	1.00	-	-	-	-	-	-	5.0	5.0
2107VA20	115/60/1	SP	-	-	-	-	-	-	-	-	-	-
2107VD20	220/50/1	SP	-	-	-	-	-	-	-	-	-	-
2907CDC22/12	12	PM	3.20	2.89	2.53	-	-	-	-	-	15.0	15.0

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

Model Selection



Diaphragm

Vacuum											
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM % local barometer in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
007BDC19	12 or 24	PM	1.40	1.00	0.70	0.45	0.20	0	25.0	5.03 x 2.36 x 6.10	2.9
007CDC19	12 or 24	PM	0.75	0.56	0.39	0.22	.05	-	23.0	5.12 x 3.35 x 6.17	2.9
107AB18XFTLBXX	100/50/1, 115/60/1	SP	0.70	0.57	0.45	0.33	0.20	-	75%	4.68 x 4.25 x 6.35	5.1
107CDU18XFTLBXX	220-230/50/1, 230/60/1	SP	0.70	0.57	0.45	0.33	0.20	-	75%	4.68 x 4.25 x 6.35	5.1
107ZC18/24	24	BLDC	0.96	0.69	0.46	0.29	0.12	-	23.0	4.68 x 4.25 x 6.08	4.5
107I220IFTLBXX	12	PM	1.45	1.10	0.80	0.50	0.20	-	75%	4.68 x 4.25 x 7.17	4.5
907BDC22	12	PM	2.13	1.34	0.88	0.56	-	-	24.1	5.89 x 4.75 x 7.88	6.5
907CDC18	12	PM	2.05	1.25	0.82	0.48	-	-	22.2	5.89 x 4.75 x 7.88	6.5
907ZC18/24	24	BLDC	2.22	1.59	1.00	0.54	.10	-	21.2	5.89 x 4.75 x 6.59	5.5
910CDC22/12	12	PM	1.97	1.53	1.05	0.65	0.28	-	24.3	5.89 x 4.75 x 7.88	8.3
927CA18	115/60/1	SP	1.24	0.89	0.64	0.36	0.16	-	23.8	6.77 x 4.75 x 7.81	11.0
927CD18	220/50/1	SP	1.15	0.73	0.53	0.33	0.11	-	23.8	6.77 x 4.75 x 7.81	11.0
2107A18XSTLNXX	115/60/1	SP	1.60	1.10	0.74	0.43	0.14	-	75%	4.71 x 4.25 x 7.47	6.0
2107DU18XSTLNXX	220-230/50/1	SP	1.25	0.88	.058	0.31	-	-	70%	4.71 x 4.25 x 7.47	6.0
2107VA20	115/60/1	SP	0.85	0.65	0.49	0.33	0.20	-	28.2	4.71 x 4.25 x 8.11	6.3
2107VD20	220/50/1	SP	0.72	0.56	0.42	0.29	0.17	-	28.3	4.71 x 4.25 x 8.11	6.3
2907CDC22/12	12	PM	3.20	2.00	1.43	0.90	0.41	-	24.0	6.16 x 4.75 x 11.50	11.0

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

007BDC



907



910



Model Selection



Rotary Vane

G 04 EB



G 045



Pressure												
MODEL	MODEL CAPACITY		FLOW l/min @ mbar								MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0.0	50	100	200	400	600	800	1000	CONTINUOUS	INTERMITTENT
G 01-K-LC(L)	6	PM	2.2	1.3	-	-	-	-	-	-	25.0	80.0
G 01-K-EB	6,12	PM	1.4	-	-	-	-	-	-	-	10.0	40.0
G 01 EB	3,6,12,24	PM	1.6	1.2	0.7	-	-	-	-	-	100.0	180.0
G 01-4 EB	6,12,24	PM	1.4	1.2	0.9	0.4	-	-	-	-	100.0	280.0
G 02 EB	3,6,12,24	PM	3.6	2.6	1.6	-	-	-	-	-	100.0	190.0
G 02-4 EB	6,12,24	PM	3.7	3.2	2.5	1.3	-	-	-	-	100.0	310.0
G 02-8	6,12	PM	2.7	2.5	2.2	1.6	0.5	-	-	-	200.0	500.0
G 04 EB	3,6,12,24	PM	6.8	4.5	2.4	-	-	-	-	-	40.0	150.0
G 04-4 EB	6,12	PM	5.1	4.0	3.0	0.9	-	-	-	-	50.0	240.0
G 04-8	12	PM	4.4	3.6	2.6	1.0	-	-	-	-	100.0	260.0
G 045-LC	12	PM	6.5	6.0	5.6	-	-	-	-	-	100.0	750.0
G 045	12,24	PM	6.1	5.8	5.5	4.5	2.9	1.3	-	-	150.0	750.0
G 07	12,24	PM	21.0	21.0	20.0	19.0	15.0	13.0	9.0	6.0	200.0	1,400.0
G 07-N	12,24	PM	20.0	19.0	18.0	16.0	-	-	-	-	250.0	900.0
G 08	12,24	PM	15.5	15.0	15.0	14.0	11.0	9.0	6.0	5.0	300.0	1400.0
G 08-T Series	12,24	PM	19.0	19.0	18.0	17.0	13.0	11.0	7.0	6.0	-	1400.0
G 08-T Parallel	12,24	PM	36.0	36.0	34.0	33.0	25.0	21.0	12.0	10.0	-	1,400.0
G09-6	12,24	PM	11.0	9.5	8.0	5.0	-	-	-	-	200.0	370.0
BL-G 02-4	12	BLDC	2.1	1.5	1.0	-	-	-	-	-	150.0	200.0
BL-G 085 M	12	BLDC	8.5	7.5	6.5	4.7	1.0	-	-	-	150.0	450.0

*PM = Permanent Magnet, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection



Rotary Vane

Vacuum											
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar CONT./INTERM.	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
G 01-K-LC(L)	3,6	PM	2.2	-	-	-	-	-	-25 / -70	20.5 x 20 x 46	0.03
G 01-K-EB	6,12	PM	1.4	-	-	-	-	-	-10 / -40	20.5 x 20 x 53	0.04
G 01 EB	3,6,12,24	PM	1.6	0.8	-	-	-	-	-100 / -200	29 x 26 x 55	0.10
G 01-4 EB	6,12,24	PM	1.4	0.9	0.4	-	-	-	-100 / -290	29 x 26 x 55	0.10
G 02 EB	3,6,12,24	PM	3.6	1.6	-	-	-	-	-100 / -190	29 x 26 x 55	0.10
G 02-4 EB	6,12,24	PM	3.7	2.5	1.3	-	-	-	-100 / -310	29 x 26 x 55	0.10
G 02-8	6,12	PM	2.7	2.1	1.5	0.3	-	-	-200 / -450	29 x 26 x 72	0.13
G 04 EB	3,6,12,24	PM	6.8	2.5	-	-	-	-	-40 / -160	29 x 26 x 62	0.10
G 04-4 EB	6,12	PM	5.1	3.0	1.0	-	-	-	-50 / -260	29 x 26 x 62	0.10
G 04-8	12	PM	4.4	2.5	0.9	-	-	-	100 / -250	29 x 26 x 78	0.14
G 045-LC	12	PM	6.5	5.7	4.5	1.8	0.8	-	-100 / -630	42 x 42 x 90	0.25
G 045	12,24	PM	6.1	5.3	4.4	2.6	0.8	-	-150 / -700	42 x 42 x 86	0.25
G 07	12,24	PM	21.0	18.0	16.0	10.0	5.0	-	-200 / -770	48 x 48 x 150	0.70
G 07-N	12,24	PM	20.0	16.2	14.2	8.5	3.0	-	-300 / -720	51 x 51 x 113	0.40
G 08	12,24	PM	15.5	13.0	12.0	8.0	5.0	1.0	-300 / -830	59 x 59 x 135	0.75
G 08-T Series	12,24	PM	19.0	17.0	15.0	11.0	7.0	3.0	- / -930	59 x 59 x 210	1.30
G 08-T Parallel	12,24	PM	36.0	32.0	27.0	19.0	10.0	2.0	- / -840	59 x 59 x 210	1.30
G09-6	12,24	PM	11.0	7.8	4.2	-	-	-	-200 / -350	40 x 40 x 60	0.30
BL-G 02-4	12	BLDC	2.1	1.0	-	-	-	-	-150 / -190	32 x 32 x 69	0.13
BL-G 085 M	12	BLDC	8.5	6.7	5.0	1.7	-	-	-150 / -500	50 x 50 x 44	0.15

*PM = Permanent Magnet, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

G-01-K-LC(L)



G 02 EB



G 07 N



Model Selection



Rotary Vane

DTE 3



DTE 6



Pressure												
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar								MAXIMUM PRESSURE bar	
	VOLTAGE	TYPE*	0	100	200	400	600	800	1000		CONTINUOUS	INTERMITTENT
VTE 3	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 3	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 3	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 3	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 3	230/50/1	PSC	58	57	55	52	47	43	38	-	1.0	1.0
DTE 3	115/60/1	PSC	70	69	68	63	60	55	-	-	0.8	0.8
DTE 3	multi	POLY	58	57	55	52	47	43	38	-	1.0	1.0
DTE 3	24	PM	58	57	55	52	47	43	38	-	1.0	1.0
VTE 6	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 6	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 6	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 6	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 6	230/50/1	PSC	100	98	97	90	85	75	67	-	1.0	1.0
DTE 6	115/60/1	PSC	120	117	115	108	102	95	83	-	1.0	1.0
DTE 6	multi	POLY	100	98	97	90	85	75	67	-	1.0	1.0
DTE 6	24	PM	100	98	97	90	85	75	67	-	1.0	1.0
VTE 8	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 8	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 8	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 8	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 8	230/50/1	PSC	133	132	128	118	113	-	-	-	0.6	0.6
DTE 8	115/60/1	PSC	160	128	153	145	133	102	98	-	0.6	0.6
DTE 8	multi	POLY	133	132	128	118	113	102	98	-	1.0	1.0
DTE 8	24	PM	133	132	128	118	113	102	98	-	1.0	1.0
VTE 10	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 10	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 10	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 10	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 10	230/50/1	PSC	167	164	158	146	134	122	-	-	0.8	0.8
DTE 10	115/60/1	PSC	200	194	187	174	161	148	-	-	0.8	0.8
DTE 10	multi	POLY	167	164	158	146	134	122	110	-	1.0	1.0
DTE 10	24	PM	167	164	158	146	134	122	110	-	1.0	1.0

*PM = Permanent Magnet, PSC = Permanent Splt Capacitor, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection

Rotary Vane

Vacuum											
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar CONT./INTERM.	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
VTE 3	230/50/1	PSC	58	51	44	31	17	3	-850 / -850	150 x 152 x 205	6.5
VTE 3	115/60/1	PSC	70	62	53	37	20	4	-850 / -850	150 x 152 x 205	6.5
VTE 3	multi	POLY	58	51	44	31	17	3	-850 / -850	150 x 152 x 205	6.5
VTE 3	24	PM	58	51	44	31	17	3	-850 / -850	150 x 152 x 210	7.9
DTE 3	230/50/1	PSC	-	-	-	-	-	-	-	150 x 152 x 205	6.5
DTE 3	115/60/1	PSC	-	-	-	-	-	-	-	150 x 152 x 205	6.5
DTE 3	multi	POLY	-	-	-	-	-	-	-	150 x 152 x 205	6.5
DTE 3	24	PM	-	-	-	-	-	-	-	150 x 152 x 210	7.9
VTE 6	230/50/1	PSC	100	89	77	52	30	7	-850 / -850	156 x 152 x 220	7.5
VTE 6	115/60/1	PSC	120	106	92	64	36	9	-850 / -850	156 x 152 x 220	7.5
VTE 6	multi	POLY	100	89	77	52	30	7	-850 / -850	156 x 152 x 220	7.5
VTE 6	24	PM	100	89	77	52	30	7	-850 / -851	156 x 152 x 225	8.5
DTE 6	230/50/1	PSC	-	-	-	-	-	-	-	156 x 152 x 220	7.5
DTE 6	115/60/1	PSC	-	-	-	-	-	-	-	156 x 152 x 220	7.5
DTE 6	multi	POLY	-	-	-	-	-	-	-	156 x 152 x 220	7.5
DTE 6	24	PM	-	-	-	-	-	-	-	156 x 156 x 225	8.5
VTE 8	230/50/1	PSC	133	117	99	68	77	10	-850 / -850	156 x 156 x 249	8.0
VTE 8	115/60/1	PSC	160	140	120	81	45	13	-850 / -850	156 x 156 x 249	8.0
VTE 8	multi	POLY	133	117	99	68	37	10	-850 / -850	156 x 156 x 249	8.0
VTE 8	24	PM	133	117	99	68	37	10	-850 / -850	156 x 156 x 245	9.2
DTE 8	230/50/1	PSC	-	-	-	-	-	-	-	156 x 156 x 249	8.0
DTE 8	115/60/1	PSC	-	-	-	-	-	-	-	156 x 156 x 249	8.0
DTE 8	multi	POLY	-	-	-	-	-	-	-	156 x 156 x 249	8.0
DTE 8	24	PM	-	-	-	-	-	-	-	156 x 156 x 245	9.2
VTE 10	230/50/1	PSC	167	150	130	90	50	10	-850 / -850	156 x 156 x 265	10.3
VTE 10	115/60/1	PSC	200	175	155	105	60	15	-850 / -850	156 x 156 x 265	10.3
VTE 10	multi	POLY	167	150	130	90	50	10	-850 / -850	156 x 156 x 265	10.1
VTE 10	24	PM	167	150	130	90	50	10	-850 / -850	156 x 156 x 270	11.8
DTE 10	230/50/1	PSC	-	-	-	-	-	-	-	156 x 156 x 265	10.3
DTE 10	115/60/1	PSC	-	-	-	-	-	-	-	156 x 156 x 265	10.3
DTE 10	multi	POLY	-	-	-	-	-	-	-	156 x 156 x 265	10.1
DTE 10	24	PM	-	-	-	-	-	-	-	156 x 156 x 270	11.8

*PM = Permanent Magnet, PSC = Permanent Split Capacitor, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.


VTE 3



VTE 6



VTE 10




Model Selection




Linear Diaphragm

LMG 4



YP-15DU



6025



Pressure								
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0 ¹⁾	100	200	400	CONTINUOUS	INTERMITTENT
LMG 4	230/50/1	LM	-	1.1	0.95	0.5	450.0	450.0
LMG 4	115/60/1	LM	-	1.2	1.0	0.35	450.0	450.0
LMG 4	12,24	LM	-	1.1	0.95	0.5	450.0	450.0
LM 15	230/50/1	LM	16.0	12.5	8.4	-	300.0	400.0
LM 15	115/60/1	LM	16.0	12.5	8.7	0.8	300.0	420.0
LM 15	12,24	LM	15.0	12.0	6.6	-	200.0	320.0
LM 22	230/50/1	LM	22.0	16.0	8.0	-	250.0	300.0
LM 22	12,24	LM	20.0	15.0	5.6	-	200.0	260.0
YP-15DU	230/50/1	LM	-	15.0	5.0	-	200.0	200.0

*LM = Linear Magnetic. If 230V 60Hz is required for YP Models, consult factory.

0¹⁾ - Free flow operation not recommended

Note: Minimum release quantities or regional availability may apply. Consult factory.



Linear Diaphragm

Pressure												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	1	2	3	4	5	6	7	CONTINUOUS	INTERMITTENT
6025SE (150057)	115/60/1	LM	2.05	1.75	1.35	0.90	0.45	-	-	-	4.0	4.0
6025SE (150058)	230/50/60/1	LM	2.13	1.86	1.43	1.04	0.60	-	-	-	4.0	4.0
6025SE (150108)	12	LM	1.50	1.08	0.73	0.41	0.16	-	-	-	4.0	4.0
6025SE (150109)	24	LM	1.50	1.08	0.73	0.41	0.16	-	-	-	4.0	4.0

*LM = Linear Magnetic.

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.




Linear Diaphragm (Vibrating Armature Type)

Pressure								
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0	100	200	400	CONTINUOUS	INTERMITTENT
106	230/50	VA	0.9	0.6	0.2	-	200.0	270.0
112.0	230/50	VA	2.8	2.0	1.2	-	280.0	280.0
112.1	230/50	VA	5.0	2.6	2.0	-	340.0	340.0
202.0	230/50	VA	4.6	3.3	1.7	-	340.0	340.0
202.1	230/50	VA	4.8	3.8	2.1	0.3	450.0	450.0
302.0	230/50	VA	5.5	4.3	3.0	1.0	500.0	500.0
302.1	230/50	VA	8.5	6.5	5.2	3.0	700.0	700.0

*VA = Vibrating armature

Note: Minimum release quantities or regional availability may apply. Consult factory.

106



Model Selection

Linear Diaphragm


Vacuum								
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar			MAX. VACUUM mbar CONT./INTERM.	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0 ¹⁾	-100	-200			
LMG 4	230/50/1	LM	-	0.9	0.4	-200 / -200	46 x 53 x 72	0.2
LMG 4	115/60/1	LM	-	0.9	0.4	-200 / -200	46 x 53 x 72	0.2
LMG 4	230/50/1	LM	-	0.9	0.4	-200 / -200	46 x 53 x 72	0.2
LM 15	230/50/1	LM	16.0	12.5	7.5	-300 / -350	65 x 111 x 107	1.0
LM 15	115/60/1	LM	16.0	12.5	8.4	-300 / -400	65 x 111 x 107	1.0
LM 15	12,24	LM	15.0	16.0	5.3	-200 / -280	76 x 111 x 107	1.0
LM 22	230/50/1	LM	22.0	16.0	6.0	-250 / -260	65 x 111 x 107	1.0
LM 22	12,24	LM	20.0	15.0	5.6	-200 / -260	76 x 111 x 107	1.0
YP-15DU	230/50/1	LM	-	-	-	-	77 x 116 x 110	1.2

*LM = Linear Magnetic.


0¹⁾ - Free flow operation not recommended

Note: Minimum release quantities or regional availability may apply. Consult factory.

LM 15



107



Linear Diaphragm

Vacuum										
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg					MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb
	VOLTAGE	TYPE*	0	2	4	6	8			
6025SE (150057)	115/60/1	LM	2.05	1.57	1.13	0.77	0.39	8.0	3.33 x 4.60 x 5.00	3.3
6025SE (150058)	230/50/60/1	LM	2.13	1.55	1.12	0.76	0.45	8.0	3.33 x 4.60 x 5.00	3.3
6025SE (150108)	12	LM	1.50	1.09	0.74	0.43	0.17	8.0	3.33 x 4.60 x 5.00	3.3
6025SE (150109)	24	LM	1.50	1.09	0.74	0.43	0.17	8.0	3.33 x 4.60 x 5.00	3.3

*LM = Linear Magnetic, 230/50/60/1 Model Flow reported at 60Hz

Note: Minimum release quantities or regional availability may apply. Consult factory.

Note: 50/60 Hz voltage - flow values listed at 60 Hz.

Linear Diaphragm (Vibrating Armature Type)

Vacuum									
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400			
107	230/50	VA	1.2	0.6	-	-	-190	60 x 60 x 90	0.3
113.0	230/50	VA	4.2	2.0	1.2	-	-280	81 x 78 x 113	0.8
113.1	230/50	VA	3.2	2.5	1.6	0.4	-450	81 x 78 x 113	0.8
203.0	230/50	VA	4.6	2.5	1.2	-	-300	91 x 70 x 140	1.6
203.1	230/50	VA	5.5	4.0	2.3	0.6	-450	91 x 70 x 140	1.6
303.0	230/50	VA	5.5	3.5	2.2	0.5	-420	97 x 78 x 165	2.2
303.1	230/50	VA	6.8	5.0	3.6	2.0	-550	97 x 78 x 165	2.2

*VA = Vibrating armature

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection



Linear Diaphragm

AP-120



Pressure								
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				OPERATING PRESSURE RANGE mbar	
	VOLTAGE	TYPE*	0	100	200	300	MINIMUM	MAXIMUM
YP-70VC	230/50/1	LM	115.0	93.0	73.0	-	50.0	200.0
AP-40	230/50/1	LM	72.0	52.0	21.0	-	50.0	200.0
AP-60N	230/50/1	LM	105.0	82.0	47.0	4.0	100.0	300.0
AP-60/80	230/50/1	LM	118.0	91.0	60.0	18.0	100.0	300.0
AP-80H	230/50/1	LM	151.0	124.0	82.0	21.0	100.0	300.0
AP-100	230/50/1	LM	172.0	143.0	108.0	48.0	140.0	300.0
AP-120	230/50/1	LM	190.0	160.0	125.0	70.0	160.0	300.0
LP-150HN	230/50/1	LM	255.0	200.0	150.0	90.0	100.0	300.0
LP-200HN	230/50/1	LM	300.0	250.0	200.0	148.0	100.0	300.0
LW-240	230/50/1	LM	385.0	315.0	240.0	-	100.0	250.0
LW-300	230/50/1	LM	570.0	480.0	350.0	-	100.0	250.0
LW-400	230/50/1	LM	625.0	530.0	425.0	-	100.0	250.0

*LM = Linear Magnetic. If 230V 60Hz required, consult factory.

Note: Minimum release quantities or regional availability may apply. Consult factory.

LW-400



Linear Diaphragm

Pressure												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								OPERATING PRESSURE RANGE psi	
	VOLTAGE	TYPE*	0	1	2	3	4	5	6	7	MINIMUM	MAXIMUM
AP-40 (150131)	115/60/1	LM	2.10	1.90	1.40	0.88	-	-	-	-	1.45	2.90
AP-60 (150132)	115/60/1	LM	2.80	2.50	2.28	1.71	-	-	-	-	1.45	2.90
AP-80 (150133)	115/60/1	LM	4.20	3.50	3.10	2.53	-	-	-	-	1.74	2.90
AP-100 (150142)	115/60/1	LM	5.00	4.70	4.20	3.80	-	-	-	-	1.45	3.62
AP-120 (150139)	115/60/1	LM	5.40	5.00	4.80	4.30	-	-	-	-	1.45	3.62

*LM = Linear Magnetic.

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection

Linear Diaphragm

Vacuum								
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar			OP VACUUM RANGE mbar MIN./MAX.	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200			
YP-70VC	230/50/1	LM	-	87.0	61.0	-50 / -200	163 X 175 X 207	6.2
AP-40	230/50/1	LM	-	-	-	-	199 X 172 X 215	4.6
AP-60N	230/50/1	LM	-	-	-	-	199 X 172 X 215	5.8
AP-60/80	230/50/1	LM	-	-	-	-	199 X 172 X 215	5.8
AP-80H	230/50/1	LM	-	-	-	-	199 X 172 X 215	6.1
AP-100	230/50/1	LM	-	-	-	-	199 X 172 X 215	6.1
AP-120	230/50/1	LM	-	-	-	-	199 X 172 X 215	6.1
LP-150HN	230/50/1	LM	-	-	-	-	218 X 179 X 250	8.6
LP-200HN	230/50/1	LM	-	-	-	-	218 X 179 X 250	8.6
LW-240	230/50/1	LM	-	-	-	-	216 X 220 X 365	14.4
LW-300	230/50/1	LM	-	-	-	-	216 X 220 X 365	16.0
LW-400	230/50/1	LM	-	-	-	-	216 X 220 X 365	16.0

*LM = Linear Magnetic. If 230V 60Hz required, consult factory

Note: Minimum release quantities or regional availability may apply. Consult factory.

YP-70VC



LP-200HN



Linear Diaphragm

Vacuum										
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg					OP VACUUM RANGE in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb
	VOLTAGE	TYPE*	0	1	2	3	4			
AP-40 (150131)	115/60/1	LM	-	-	-	-	-	-	7.84 x 7.01 x 8.58	10.3
AP-60 (150132)	115/60/1	LM	-	-	-	-	-	-	7.84 x 7.01 x 8.58	10.9
AP-80 (150133)	115/60/1	LM	-	-	-	-	-	-	7.84 x 7.01 x 8.58	10.9
AP-100 (150142)	115/60/1	LM	-	-	-	-	-	-	7.84 x 7.01 x 8.58	12.6
AP-120 (150139)	115/60/1	LM	-	-	-	-	-	-	7.84 x 7.01 x 8.58	12.6

*LM = Linear Magnetic.

Note: Minimum release quantities or regional availability may apply. Consult factory.

Model Selection


1210 DC



6311



6410



6420



LMF



SR10/30 DC




SR10/50 DC



SR18



SR25 DC



Liquid Diaphragm

TYPICAL CHARACTERISTICS

safe dry running, self priming, different diaphragm materials possible, connection via nozzle or thread

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW ml/min	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
1210	DC	PM	180	10 m H ₂ O	6.0 m H ₂ O	Continuous	37 x 23 x 52
5002F	DC	PM	400	15 m H ₂ O	6.0 m H ₂ O	Continuous	80 x 30 x 52
5002FZ	DC	PM	1100	25 m H ₂ O	5.0 m H ₂ O	Continuous	82 x 30 x 86
6311	DC	BLDC	190	40 m H ₂ O	3.0 m H ₂ O	Continuous	42 x 32 x 66
6410	DC	PM	700	10 m H ₂ O	3.0 m H ₂ O	Continuous	60 x 31 x 82
6410	DC	BLDC	700	10 m H ₂ O	3.0 m H ₂ O	Continuous	75 x 54 x 73
6420	DC	BLDC	1800	10 m H ₂ O	3.0 m H ₂ O	Continuous	86 x 59 x 94
F120 stepper	DC/AC*	ST	1-260	60 m H ₂ O	4.0 m H ₂ O	Continuous	102 x 59 x 87
F120	DC	PM	900	20 m H ₂ O	4.0 m H ₂ O	Continuous	126 x 61 x 101

DC/AC* = With separate electronics, PM = Permanent Magnet, ST = Stepper motor

Note: Minimum release quantities or regional availability may apply. Consult factory.



Liquid Linear

TYPICAL CHARACTERISTICS

self priming, individual impulse drive, long life; pulse control, dosing pumps available

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW ml/min	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
LMF 3	AC or DC*	LM	250	7.5 m H ₂ O	2.0 m H ₂ O	Continuous	46 x 53 x 72
LMF 4	AC or DC*	LM	300	9.0 m H ₂ O	3.0 m H ₂ O	Continuous	46 x 53 x 72
LMF Dosing	DC	LM	63	5.6 m H ₂ O	1.0 m H ₂ O	Continuous	46 x 53 x 88

DC* = With separate electronics, LM = Linear drive

Note: Minimum release quantities or regional availability may apply. Consult factory.



Liquid Peristaltic, Direct Drive

TYPICAL CHARACTERISTICS

safe dry running, adjustable via speed, reversible (DC), interchangeable cassettes, wide range of tubing options

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW ml/min	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
SR10/30	DC	PM	16-55	8 m H ₂ O	8 m H ₂ O	Continuous	68 x 54 x 40
SR10/30	DC	PM	20-80	8 m H ₂ O	8 m H ₂ O	Continuous	81 x 56 x 40
SR10/30	DC/AC*	ST	0.48-20	8 m H ₂ O	8 m H ₂ O	Continuous	38 x 53 x 40
SR10/50	DC	PM	52-220	8 m H ₂ O	8 m H ₂ O	Continuous	85 x 60 x 57

DC/AC* = With separate electronics, PM = Permanent Magnet, ST = Stepper motor, PSC = Permanent split capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.



Liquid Peristaltic, Gear Drive

TYPICAL CHARACTERISTICS

insensitive against contamination, adjustable via speed, pumping of highly viscous liquids, sterilisable tubes, simple changing of tubing, wide range of tubing available

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW ml/min	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
SR18	AC	SY	3-50	10 m H ₂ O	8 m H ₂ O	Continuous	61.5 x 68 x 90
SR25	AC	SY	0.2-14	10 m H ₂ O	8 m H ₂ O	Continuous	92 x 86 x 80
SR25	AC or DC	SP/PM	2.0-746	10 m H ₂ O	8 m H ₂ O	Continuous	156 x 80 x 108
SR25-300S	DC/AC*	ST	0.1-430	10 m H ₂ O	8 m H ₂ O	Continuous	96 x 80 x 101

DC/AC* = With separate electronics, PM = Permanent Magnet, ST = Stepper motor, SP = Shaded Pole, SY = Syncro

Note: Minimum release quantities or regional availability may apply. Consult factory.

Notes

Conversion of Units

Flow

1 cfm = 28.32 l/min
1 l/min = 0.0353 cfm

Vacuum

1 in. Hg = 33.8 mbar
1 mbar = 0.0296 in. Hg

Weight

1 lb = 0.4536 kg
1 kg = 2.21 lb

Pressure

1 psi = 0.069 bar
1 bar = 14.5 psi

Dimensions

1 in = 25.4 mm
1 mm = 0.0394 in

Temperature

$^{\circ}\text{C} = 0.55 \times (^{\circ}\text{F} - 32.0)$
 $^{\circ}\text{F} = (1.8 \times ^{\circ}\text{C}) + 32.0$

